


Applications

This universal remote control is specially designed to operate swing, sliding and boom gate, or garage door. The receiver can be easily fitted into gate controller box.

Wiring:

Six flying leads:	Red/red	Power 12-27VAC/DC
	Blue/blue	Relay output 1 NO
	Yellow/yellow	Relay output 2 NO

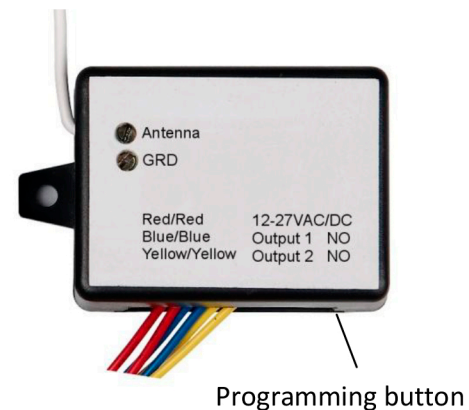

Operation:

Two remotes have been pre-learned to the receiver as part of kit. However it is easy to learn an additional remote or delete any remote.

How to learn a remote

1. Press and hold the programming button on the receiver for one second; LED on. The programming button is located at the bottom of the receiver
2. Press button 1 on the remote to learn. LED flashes 3 times and stays on for 4 seconds then off. Done.

How to delete all remotes

Press and hold programming button on the receiver for 5 seconds till LED turns off. LED flashes 10 times. Done.

How to delete a lost remote

1. Recall the remote which had been learned into the receiver right before the lost remote
2. Press and hold programming button on the receiver for 1 second; LED on.
3. Press Button 1 and Button 2 simultaneously; LED flashes 5 times and off; successfully deleting the lost remote.

Features:

- Specially designed for swing, sliding, and boom gate remote control
- Compact design: can be easily fitted into gate controller cabinet
- Large capacity of up to 1000 users
- 2 relay outputs: Normally Open
- Easy to add and delete a remote
- Antenna: detachable and extendable
- Power: 12-27VAC/DC – can take power directly from most motor control boards
- Remote options: stylish (RTW19); sliding cover (RTR01); water proof (RTO02)
- 433MHz; Keeloq rolling code
- All remotes can be fitted with a prox tag (125KHz or 13.56MHz)