
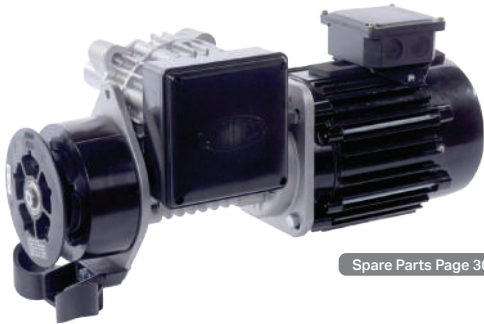


M-DRIVE

OPERATORS FOR SPRING-BALANCED ROLLER SHUTTERS



Spare Parts Page 30

Model	Nominal Power		Rated Current	Voltage	Phase	Max. Door Size	IP Rating	Duty	Reversing Starter	Mechanical Logic		
										GLM6L	GLM6	
M-Drive Operator • Low Cycle • Three Phase 415V									CONTROL OPTIONS (NOT INCLUDED)			
ML053M	0.37kW	0.5Hp	1.55A	415V	3ph	18m²	IP44	LC-10	RG374-LB3E006	+	+	+
ML103M	0.75kW	1.0Hp	2.30A	415V	3ph	36m²	IP44	LC-10	RG374-LB3E007	+	+	+
ML153M	1.10kW	1.5Hp	2.55A	415V	3ph	50m²	IP44	LC-10	RG374-LB3E007	+	+	+

M-Drive Operator • Low Cycle • Single Phase 240V								
ML051M	0.37kW	0.5Hp	3.40A	240V	1ph	18m²	IP44	LC-10
ML102M	0.75kW	1.0Hp	6.0A	240V	1ph	36m²	IP44	LC-10

RG375-LB1E008	+	+	+
RG376-LB1E009	+	+	+

M-Drive Operator • High Cycle • Three Phase 415V								
MH103M	0.75kW	1.0Hp	1.95A	415V	3ph	30m²	IP44	HC-30

RG374-LB3E007	+	+	+
---------------	---	---	---

M-Drive Operator • High Cycle • Single Phase 240V								
MH102M	0.75kW	1.0Hp	4.35A	240V	1ph	30m²	IP44	HC-30

RG376-LB1E009	+	+	+
---------------	---	---	---

When ordering please specify an "L" or an "R" at the end of every part number.
Clutch (C) option available. Refer additional pricing on page 13.

See page 24 for complete range of Reversing Starters.
See page 22 for complete range of GLM6 Mechanical Logic Control options to suit each operator.

SPECIALTY M-DRIVE OPERATORS FOR ROLLER SHUTTERS



M-Drive with D80 Flange

Model	Nominal Power		Rated Current	Voltage	Phase	Max. Door Size	IP Rating	Duty	Reversing Starter	Mechanical Logic		
							GLM6L			GLM6		
M-Drive Operator • High Cycle • Three Phase 415V • D80 Flange (IP55)									CONTROL OPTIONS (NOT INCLUDED)			
MH103M8	0.75kW	1.0Hp	1.95A	415V	3ph	36m²	IP55	HC-60	RG374-LB3E007	+	+	+
M-Drive Operator • High Cycle • Three Phase 415V • Solenoid Brake (IP55)												
MH103MB	0.75kW	1.0Hp	1.95A	415V	3ph	36m²	IP55	HC-60	RG374-LB3E007	+	+	+
M-Drive Operator • High Cycle • Three Phase 415V • Waterproof & Dust Ignition Proof (IP66)												
MH103MD	0.75kW	1.0Hp	1.95A	415V	3ph	36m²	IP66	HC-60	RG374-LB3E007-EX	+	-	-
M-Drive Operator • High Cycle • Three Phase 415V • Flameproof Exd (IP55)												
MH103MF	0.75kW	1.0Hp	1.95A	415V	3ph	36m²	IP55	HC-60	RG374-LB3E007-EX	+	-	-

When ordering please specify an "L" or an "R" at the end of every part number.

See page 24 for complete range of Reversing Starters.
See page 22 for complete range of GLM6 Mechanical Logic Control options to suit each operator.

Popular Accessories

Reversing Starter

RG374

Page 24



Mechanical Logic Control (Light)

GLM6L

Page 22



Mechanical Logic Control

GLM6

Page 22



Mounting Plate Kit

THK-1018

Page 28

