

REMOTE PRO

PROGRAMMING INSTRUCTIONS



RPR050 RECEIVER INSTRUCTIONS

CODING REMOTES TO RECEIVER

1. Press and hold the button on the remote you want to program and don't let go.
2. Press and hold the learn button on the receiver (circled in blue below) for about 1-2 seconds until the led comes on and let go.
3. Release the button on the remote when the led on the receive flashes or goes out.

ERASING ALL REMOTES FROM RECEIVER

1. Press and hold the learn button on the receiver (circled in blue below) for about 6 seconds until the led comes on and then goes out then let go.
2. Test a remote that was working and ensure it is no longer working

WIRING RECEIVER – MUST REFER TO YOUR MOTOR MANUAL

NO = Normally Open

COM = Common (for relay)

NC = Normally Closed



+ = Positive Power

- = Negative Power

Receiver memory capacity: 15

Voltage: 12-24V

To wire in the receiver to your motor please refer to your motor manual and it is strongly recommended to have a door technician or electrician to assist in wiring.

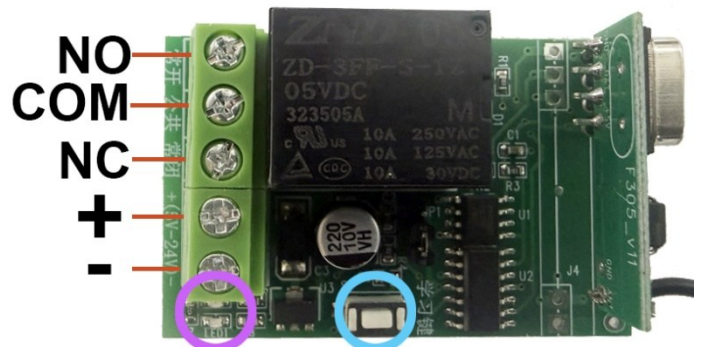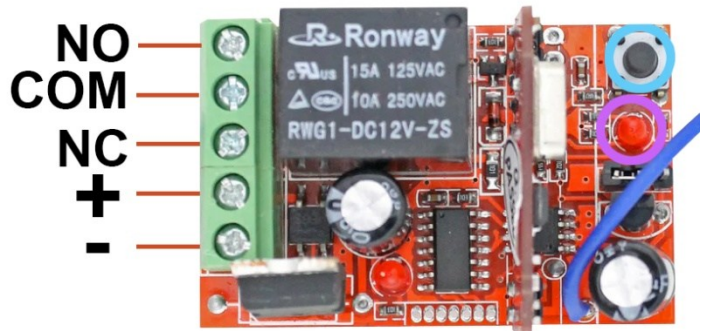

WARNING

This product may contain a coin/button cell battery. Keep product and batteries away from children. A battery can cause severe or fatal injuries in 2 hours or less if swallowed or placed inside any part of the body. Seek immediate medical attention if it is suspected that a coin/button cell battery has been swallowed or placed inside of any part of the body.

